

Hanke

	Side	Model
[	Gering, Ø20 mm, rør176	Type 222
	Gering, Ø26 mm, rør177	Type 222
	Gering, Ø32 mm, rør177	Type 222
	Gering, Ø40 mm, rør177	Type 222
T	T-form, Ø20 mm, rør178	Type 122
	T-form, Ø26 mm, rør179	Type 122
	T-form, Ø32 mm, rør179	Type 122
	T-form, Ø40 mm, rør179	Type 122
C	U-form, Ø14 mm, lige massiv174	1512
	U-form, Ø16 mm, lige massiv174	1513
	U-form, Ø19 mm, lige massiv174	1514
	U-form, Ø26 mm, lige rør.....175	Type 22
	U-form, Ø32 mm, lige rør175	Type 22
	U-form, Ø40 mm, lige rør.....175	Type 22
r	U-form, Ø14 mm, forkrøppet massiv180	1532
	U-form, Ø16 mm, forkrøppet massiv180	1533
	U-form, Ø19 mm, forkrøppet massiv180	1534
	U-form, Ø26 mm, forkrøppet rør181	Type 23
	U-form, Ø32 mm, forkrøppet rør.....181	Type 23
	U-form, Ø40 mm, forkrøppet rør.....181	Type 23

Hanke

	Side	Model
	U-form, Ø16 mm, lige massiv med rosetter182	1550
	U-form, Ø16 mm, lige massiv med rosetter183	1551
	U-form, Ø19 mm, lige massiv med rosetter183	1552
	U-form, Ø16 mm, forkrøppet massiv med rosetter184	1554
	U-form, Ø19 mm, forkrøppet massiv med rosetter184	1558
	Komé hank lige, Ø19 mm, Design C. F. Møller Architects.....187	1573
	Wing hank lige, Ø19 mm, Design AART Architects188	1574
	Grata hank, Design Friis & Molke189	1577
	Albuehank Ø16 mm, massiv som sæt185	1565
	Albuehank Ø16 mm, massiv som sæt med skilt186	1567
	Skydedørsskål/hank, på skilt 175 x 65 x 2 mm.190	1580
	Skydedørsskål/hank, på skilt 175 x 65 x 2 mm.191	1590
	Skydedørsskål/hank, på skilt 175 x 170 x 2 mm.191	1591

Pull handles

	Page	No
[	Mitred, Ø20 mm, hollow176	Type 222
	Mitred, Ø26 mm, hollow177	Type 222
	Mitred, Ø32 mm, hollow177	Type 222
	Mitred, Ø40 mm, hollow177	Type 222
└	T-shaped, Ø20 mm, hollow178	Type 122
	T-shaped, Ø26 mm, hollow179	Type 122
	T-shaped, Ø32 mm, hollow179	Type 122
	T-shaped, Ø40 mm, hollow179	Type 122
C	U-shaped, Ø14 mm, solid174	1512
	U-shaped, Ø16 mm, solid174	1513
	U-shaped, Ø19 mm, solid174	1514
	U-shaped, Ø26 mm, hollow.....175	Type 22
	U-shaped, Ø32 mm, hollow175	Type 22
	U-shaped, Ø40 mm, hollow.....175	Type 22
r	U-shaped, cranked, Ø14 mm, solid180	1532
	U-shaped, cranked, Ø16 mm, solid180	1533
	U-shaped, cranked, Ø19 mm, solid180	1534
	U-shaped, cranked, Ø26 mm, hollow181	Type 23
	U-shaped, cranked, Ø32 mm, hollow181	Type 23
	U-shaped, cranked, Ø40 mm, hollow181	Type 23

Pull handles

	Page	No
	U-shaped, Ø16 mm, solid with roses182	1550
	U-shaped, Ø16 mm, solid with roses183	1551
	U-shaped, Ø19 mm, solid with roses183	1552
	U-shaped, cranked, Ø16 mm, solid with roses184	1554
	U-shaped, cranked, Ø19 mm, solid with roses184	1558
	Komé pull handle, Ø19 mm, Design C. F. Møller Architects.....187	1573
	Wing pull handle, Ø19 mm, Design AART Architets.....188	1574
	Grata handle, Design Friis & Molke189	1577
	Elbow handle, Ø16 mm, solid, in pairs.....185	1565
	Elbow handle, Ø16 mm, solid, in pairs with backplate...186	1567
	Backplate with flush handle, 175 x 65 x 2 mm.190	1580
	Backplate with flush handle, 175 x 65 x 2 mm.191	1590
	Backplate with flush handle ,175 x 170 x 2 mm.191	1591

1512-1513-1514



Massiv lige hank, Ø14, Ø16, Ø19 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. som hul- eller gevinddel, ekskl. bolte. Huldel leveres med pinolskrue, gevinddel med M8 gevind. Montagesæt bestilles særskilt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling.

Solid, straight pull handle, Ø14, Ø16, Ø19 mm

- Available in satin stainless steel (AISI 304).
- Supplied singly, thread or pin side, without fixing sets. Pin side supplied with grub screw, thread side supplied with M8 thread. Fixing sets should be ordered separately, see code scheme.
- Specify fixing centres and separate fixing sets when ordering.




CC	125 mm	200 mm	300 mm	400 mm	650 mm	
Ø14 mm	1512.01.GEV / HUL	1512.04.GEV / HUL	1512.02.GEV / HUL	1512.05.GEV / HUL	1512.03.GEV / HUL	55 mm
Ø16 mm	1513.01.GEV / HUL	1513.04.GEV / HUL	1513.02.GEV / HUL	1513.05.GEV / HUL	1513.03.GEV / HUL	55 mm
Ø19 mm	1514.01.GEV / HUL	1514.04.GEV / HUL	1514.02.GEV / HUL	1514.05.GEV / HUL	1514.03.GEV / HUL	60 mm

GEV = gevinddel. HUL = huldel
GEV = thread side. HUL = pin side

Montagesæt · Fixing Sets

Leveres i sæt - supplied in pairs

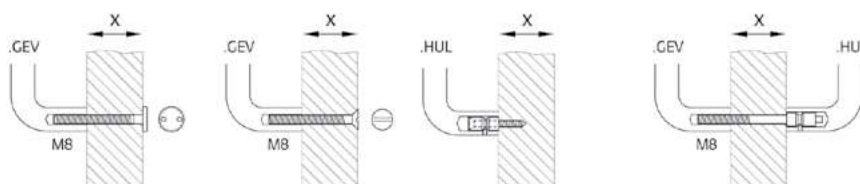

X =

10 - 22 mm	53002/MA*	74071/GA*		53040/SA*
23 - 30 mm	53002/MB	74071/GB		53040/SB
31 - 42 mm	53002/MC	74071/GC	53050T	53040/SC
43 - 54 mm	53002/MD	74071/GD	53050T	53040/SD
55 - 66 mm	53002/ME	74071/GE	53050T	53040/SE
67 - 78 mm	53002/MF	74071/GF	53050T	53040/SF
79 - 90 mm	53002/MG	74071/GG	53050T	53040/SG
90 - 102 mm			53050T	53040/SH

* Incl. tilbehør for glasmontering. Hul i glas: Ø12 mm. Alle montagesæt leveres inkl. løse skiver Ø28 x 2 mm. Husk at lægge disse til dørtykkelsen!

* Includes accessories for glass mounting. Bores in glass Ø12 mm. All fixing sets supplied incl. washers Ø28 x 2 mm. Remember to add these to the door thickness!

Type 22



Rørhank, lige, Ø26, Ø32, Ø40 mm

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, straight pull handle, Ø26, Ø32, Ø40 mm

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.

CC standard	200 mm	300 mm	400 mm	
Ø26 mm	2856-2445010009	2856-2445030009	2856-2445050009	85 mm
Ø32 mm	2856-2445110009	2856-2445130009	2856-2445150009	88 mm
Ø40 mm				103 mm

Speciallængder leveres som følger / Special x-centres as follows:

Ø 26 mm: 200 mm - 2.650 mm.


Ø 32 mm: 200 mm - 2.650 mm.

Ø 40 mm: 351 mm - 2.650 mm.


Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors



No. 2856-0472110000
Dt. 38 - 72 mm




No. 2856-0471320000




No. 2856-2365830000
Dt. 38 - 72 mm

Glasdøre · Glass doors



No. 2856-0472440000
Dt. 8 - 12 mm


Hul i glas: Ø18 mm
Bore in glass: Ø18 mm




No. 2856-2365840000
Dt. 8 - 12 mm

Hul i glas: Ø18 mm
Bore in glass: Ø18 mm


Aluminiumdøre · Aluminium doors



No. 2856-0471210000



K 9 - 23 mm - no. 2856-0471501000
K 23 - 41 mm - no. 2856-0471502000



No. 2856-0471430000

Type 222



Rørhank, i geringsform, ø20 mm

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, mitred pull handle, ø20 mm

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.

■					
CC					
Standard	200 mm	300 mm	400 mm		
Ø20 mm	2856-2129310009	2856-2129330009	2856-2129330009	69 mm	




Speciallængder leveres som følger / Special x-centres as follows:

200 mm - 1.250 mm.


Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors



No. 2856-2363110000
Dt. 38 - 78 mm




No. 2856-2362320000




No. 2856-2365850000
Dt. 38 - 78 mm

Glasdøre · Glass doors




No. 2856-2363440000
Dt. 8 - 12 mm




No. 2856-2365860000
Dt. 8 - 12 mm

Aluminiumdøre · Aluminium doors



No. 2856-2362210000



K 9 - 23 mm - no. 2856-2362220000
K 23 - 41 mm - no. 2856-2362230000

Hul i glas: ø10 mm
Bore in glass: ø10 mm

Hul i glas: ø10 mm
Bore in glass: ø10 mm

Type 222



Rørhank, i geringsform, Ø26, Ø32, Ø40 mm

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, mitred pull handle, Ø26, Ø32, Ø40 mm

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.

Leveres i følgende længder / Deliverable with the following x-centres:


- Ø 26 mm: 200 mm - 2.650 mm.
- Ø 32 mm: 200 mm - 2.650 mm.
- Ø 40 mm: 351 mm - 2.650 mm.




Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors




No. 2856-0472110000
Dt. 38 - 72 mm



No. 2856-0471320000




No. 2856-2365830000
Dt. 38 - 72 mm



No. 2856-0472440000
Dt. 8 - 12 mm


Hul i glas: Ø18 mm
Bore in glass: Ø18 mm




No. 2856-2365840000
Dt. 8 - 12 mm

Hul i glas: Ø18 mm
Bore in glass: Ø18 mm


Aluminiumdøre · Aluminium doors



No. 2856-0471210000



K 9 - 23 mm - no. 2856-0471501000
K 23 - 41 mm - no. 2856-0471502000



No. 2856-0471430000

Type 122



Rørhank, T-formet, ø20 mm

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, straight pull handle, ø20 mm

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.




CC	150 mm	200 mm
Total	300 mm	400 mm
Ø20 mm	2856-2483330009	2856-2483350009


Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors



No. 2856-2363110000
Dt. 38 - 78 mm




No. 2856-2362320000




No. 2856-2365850000
Dt. 38 - 78 mm

Glasdøre · Glass doors




No. 2856-2363440000
Dt. 8 - 12 mm




No. 2856-2365860000
Dt. 8 - 12 mm

Aluminiumdøre · Aluminium doors



No. 2856-2362210000



K 9 - 23 mm - no. 2856-2362220000
K 23 - 41 mm - no. 2856-2362230000

Hul i glas: ø10 mm
Bore in glass: ø10 mm

Hul i glas: ø10 mm
Bore in glass: ø10 mm

Type 122



Rørhank, T-formet, Ø26, Ø32, Ø40 mm.

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, straight pull handle, Ø26, Ø32, Ø40 mm.

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.



CC standard	400 mm	
Total	600 mm	
Ø26 mm	2856-2483080009	85 mm
Ø32 mm	2856-2483180009	88 mm
Ø40 mm		103 mm


Speciallængder leveres som følger / Special lengths as follows:

- Ø 26 mm: 251 mm - 2.650 mm
- Ø 32 mm: 251 mm - 2.650 mm
- Ø 40 mm: 251 mm - 2.650 mm


Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors




No. 2856-0472110000
Dt. 38 - 72 mm




No. 2856-0471320000



No. 2856-2365830000
Dt. 38 - 72 mm




No. 2856-0472440000
Dt. 8 - 12 mm




No. 2856-2365840000
Dt. 8 - 12 mm


Aluminiumdøre · Aluminium doors



No. 2856-0471210000



K 9 - 23 mm - no. 2856-0471501000
K 23 - 41 mm - no. 2856-0471502000



No. 2856-0471430000

Hul i glas: Ø18 mm
Bore in glass: Ø18 mm

Hul i glas: Ø18 mm
Bore in glass: Ø18 mm

1532-1533-1534



Massiv hank, forkrøppet, Ø14, Ø16, Ø19 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. som hul- eller gevinddel, ekskl. bolte. Huldel leveres med pinolskrue, gevinddel med M8 gevind. Montagesæt bestilles særskilt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling.

Solid, cranked pull handle, Ø14, Ø16, Ø19 mm

- Available in satin stainless steel (AISI 304).
- Supplied singly, thread or pin side, without fixing sets. Pin side supplied with grub screw, thread side supplied with M8 thread. Fixing sets should be ordered separately, see code scheme.
- Specify fixing centres and separate fixing sets when ordering.




CC	125 mm	200 mm	300 mm	400 mm	650 mm		
Ø14 mm	1532.01.GEV / HUL	1532.04.GEV / HUL	1532.02.GEV / HUL	1532.05.GEV / HUL	1532.03.GEV / HUL	60 mm	55 mm
Ø16 mm	1533.01.GEV / HUL	1533.04.GEV / HUL	1533.02.GEV / HUL	1533.05.GEV / HUL	1533.03.GEV / HUL	60 mm	55 mm
Ø19 mm	1534.01.GEV / HUL	1534.04.GEV / HUL	1534.02.GEV / HUL	1534.05.GEV / HUL	1534.03.GEV / HUL	75 mm	60 mm

GEV = gevinddel. HUL = huldel
GEV = thread side. HUL = pin side

Montagesæt · Fixing Sets

Leveres i sæt – supplied in pairs

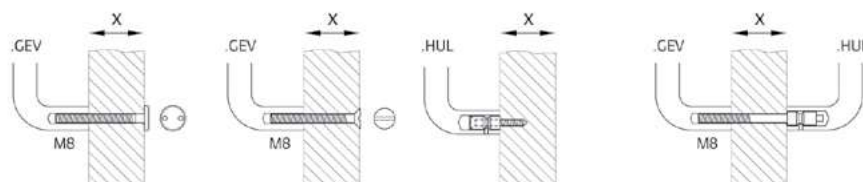

X =

10 - 22 mm	53002/MA*	74071/GA*		53040/SA*
23 - 30 mm	53002/MB	74071/GB		53040/SB
31 - 42 mm	53002/MC	74071/GC	53050T	53040/SC
43 - 54 mm	53002/MD	74071/GD	53050T	53040/SD
55 - 66 mm	53002/ME	74071/GE	53050T	53040/SE
67 - 78 mm	53002/MF	74071/GF	53050T	53040/SF
79 - 90 mm	53002/MG	74071/GG	53050T	53040/SG
90 - 102 mm			53050T	53040/SH

* Incl. tilbehør for glasmonter. Hul i glas: Ø12 mm. Alle montagesæt leveres inkl. løse skiver Ø28 x 2 mm. Husk at lægge disse til dørtykkelsen!

* Includes accessories for glass mounting. Bores in glass Ø12 mm. All fixing sets supplied incl. washers Ø28 x 2 mm. Remember to add these to the door thickness!

Type 23




Rørhank, forkrøppet, Ø26, Ø32, Ø40 mm

- Leveres som standard i matbørstet syrefast rustfrit stål (AISI 316).
- Leveres i stk. ekskl. montagesæt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling, se skema nedenfor.

Hollow, cranked pull handle, Ø26, Ø32, Ø40 mm

- Available in satin stainless steel (AISI 316).
- Supplied singly without fixing sets.
- Specify fixing centres and separate fixing sets when ordering, see code scheme below.



CC	standard	200 mm	300 mm	400 mm		
Ø26 mm		2856-2453010009	2856-2453030009	2856-2453050009	120 mm	85 mm
Ø32 mm		2856-2453110009	2856-2453130009	2856-2453150009	120 mm	88 mm
Ø40 mm					165 mm	103 mm


Speciallængder leveres som følger / Special x-centres as follows:

- Ø 26 mm: 200 mm - 650 mm.
- Ø 32 mm: 200 mm - 2.650 mm.
- Ø 40 mm: 351 mm - 2.650 mm.


Montagesæt · Fixing Sets

Leveres i stk. - supplied singly


Massive døre · Timber doors



No. 2856-0472110000
Dt. 38 - 72 mm




No. 2856-0471320000




No. 2856-2365830000
Dt. 38 - 72 mm

Glasdøre · Glass doors



No. 2856-0472440000
Dt. 8 - 12 mm


Hul i glas: Ø18 mm
Bore in glass: Ø18 mm




No. 2856-2365840000
Dt. 8 - 12 mm

Hul i glas: Ø18 mm
Bore in glass: Ø18 mm


Aluminiumdøre · Aluminium doors



No. 2856-0471210000



K 9 - 23 mm - no. 2856-0471501000
K 23 - 41 mm - no. 2856-0471502000




No. 2856-0471430000

1550



Massiv hank, lige med flanger, til ensidig montage, Ø16 mm, flange Ø45x3 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer 3,5x16 mm.



Straight, solid pull handle, Ø16 mm, face fixing with roses Ø45x3 mm

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws 3,5x16 mm.


CC	200 mm	300 mm	400 mm	650 mm
Ø16 mm	1550.01	1550.02	1550.03	1550.04

1551-1552



Massiv lige hank, Ø16 og 19 mm, med dækrosetter Ø52x4 mm, ingen synlige skruer

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer 3,5x16 mm.




Straight, solid pull handle, Ø16 and 19 mm, face fixing with rose covers Ø52x4 mm, concealed screws

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws 3,5x16 mm.

CC	200 mm	300 mm	400 mm	650 mm	
Ø16 mm	1551.01	1551.02	1551.03	1551.04	57 mm
Ø19 mm	1552.01	1552.02	1552.03	1552.04	62 mm



1554-1558



Massiv hank, forkrøppet Ø16 og 19 mm, til ensidig montage med dækrosetter Ø52x4 mm, ingen synlige skruer


- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer 3,5x16 mm.

Cranked, solid pull handle, Ø16 and 19 mm, face fixing with rose covers Ø52x4 mm, concealed screws

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws 3,5x16 mm.

■					
CC	200 mm	300 mm	400 mm		
Ø16 mm	1554.01	1554.02	1554.03	57 mm	60 mm
Ø19 mm	1558.01	1558.02	1558.03	62 mm	75 mm

1565

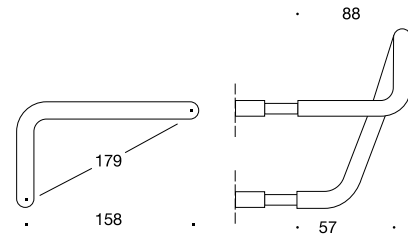**Specialprodukt, produceres efter ordre**

Massiv albuehank, forkrøppet, Ø16 mm, til gennemgående montage. Angiv dørtykkelse ved bestilling

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i sæt inkl. M8 sammenspændingsbolte samt løse underlagsskiver Ø28x2 mm.

Special, made to order

Cranked, solid pull handle, Ø16 mm, back to back fixing.


Specify door thickness when ordering

- Available in satin stainless steel (AISI 304).
- Supplied in pairs, including M8 assembly screws and loose washers Ø28x2 mm.

CC	158 mm
Ø16 mm	1565.00

Denne hank kan eventuelt leveres med rosetter.
 Spørg salgsafdelingen. /
 This handle is also available with escutcheons.
 Contact sales department.

1567

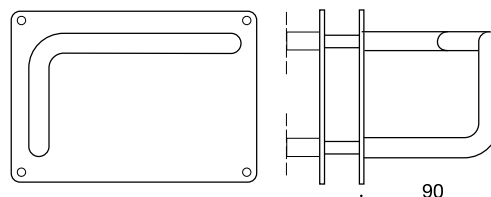

Specialprodukt, produceres efter ordre

Massiv albuehank, forkrøppet $\varnothing 16$ mm. Leveres med skilt 200x140x2 mm, undersænkede huller for træskruer eller M4 skruer. Angiv dørtykkelse ved bestilling.

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i sæt. inkl. sammenspændingsbolte.

Special, made to order

Cranked, solid pull handle, $\varnothing 16$ mm, back to back fixing. Supplied with backplate 200x140x2 mm. Drilled for countersunk wood screws or M4 screws. Specify door thickness when ordering

- Available in satin stainless steel (AISI 304).
- Supplied in pairs including assembly screws.

■	
CC	158 mm
$\varnothing 16$ mm	1567.00

Denne hank kan eventuelt leveres med rosetter istedet for bagplade. Spørg salgsafdelingen. / This handle is also available with escutcheons instead of backplate. Contact sales department.

1573




Massiv lige hank, Ø19 mm. Designet af C.F. Møller Architects, passende til dørgræb nr. 1073

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. som hul- eller gevinddel, ekskl. bolte. Huldel leveres med pinolskrue, gevinddel med M8 gevind. Montagesæt bestilles særskilt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling.

Solid, straight pull handle, Ø19 mm. Designed by C.F. Møller Architects to match lever handle no. 1073

- Available in satin stainless steel (AISI 304).
- Supplied singly, thread or pin side, without fixing sets. Pin side supplied with grub screw, thread side supplied with M8 thread. Fixing sets should be ordered separately, see code scheme.
- Specify fixing centres and separate fixing sets when ordering.




69

CC	300 mm	650 mm
Ø19 mm	1573.02.GEV / HUL	1573.03.GEV / HUL

GEV = gevinddel. HUL = huldel
 GEV = thread side. HUL = pin side

Leveres i sæt – supplied in pairs

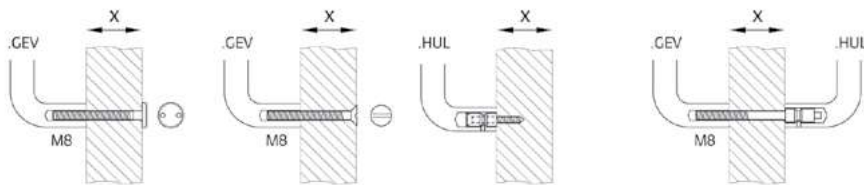

X =

10 - 22 mm	53002/MA*	74071/GA*	53040/SA*
23 - 30 mm	53002/MB	74071/GB	53040/SB
31 - 42 mm	53002/MC	74071/GC	53050T 53040/SC
43 - 54 mm	53002/MD	74071/GD	53050T 53040/SD
55 - 66 mm	53002/ME	74071/GE	53050T 53040/SE
67 - 78 mm	53002/MF	74071/GF	53050T 53040/SF
79 - 90 mm	53002/MG	74071/GG	53050T 53040/SG
90 - 102 mm			53050T 53040/SH

* Inkl. tilbehør for glasmontering. Hul i glas: Ø12 mm. Alle montagesæt leveres inkl. løse skiver Ø28 x 2 mm. Husk at lægge disse til dørtykkelsen!

* Includes accessories for glass mounting. Bores in glass Ø12 mm. All fixing sets supplied incl. washers Ø28 x 2 mm. Remember to add these to the door thickness!

1574



Massiv lige hank, Ø19 mm. Designet af AART Designers, passende til dørgræb nr. 1074

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. som hul- eller gevinddel, ekskl. bolte. Huldel leveres med pinolskrue, gevinddel med M8 gevind. Montagesæt bestilles særskilt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling.

Solid, straight pull handle, Ø19 mm. Designed by AART Designers to match lever handle no. 1074

- Available in satin stainless steel (AISI 304).
- Supplied singly, thread or pin side, without fixing sets. Pin side supplied with grub screw, thread side supplied with M8 thread. Fixing sets should be ordered separately, see code scheme.
- Specify fixing centres and separate fixing sets when ordering.




68,5

CC	300 mm	650 mm
Ø19 mm	1574.02.GEV / HUL	1574.03.GEV / HUL

GEV = gevinddel. HUL = huldel
GEV = thread side. HUL = pin side

Leveres i sæt - supplied in pairs

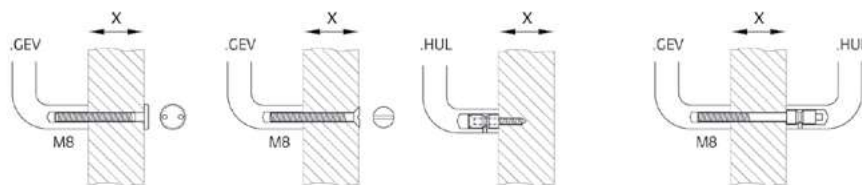

X =

10 - 22 mm	53002/MA*	74071/GA*	53040/SA*
23 - 30 mm	53002/MB	74071/GB	53040/SB
31 - 42 mm	53002/MC	74071/GC	53050T 53040/SC
43 - 54 mm	53002/MD	74071/GD	53050T 53040/SD
55 - 66 mm	53002/ME	74071/GE	53050T 53040/SE
67 - 78 mm	53002/MF	74071/GF	53050T 53040/SF
79 - 90 mm	53002/MG	74071/GG	53050T 53040/SG
90 - 102 mm			53050T 53040/SH

* Incl. tilbehør for glasmontage. Hul i glas: Ø12 mm. Alle montagesæt leveres inkl. løse skiver Ø28 x 2 mm. Husk at lægge disse til dørtykkelsen!

* Includes accessories for glass mounting. Bores in glass Ø12 mm. All fixing sets supplied incl. washers Ø28 x 2 mm. Remember to add these to the door thickness!

1577




Massiv lige hank, Ø19 mm. Designet af Friis & Molke Design, passende til dørgreb nr. 1077

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. som hul- eller gevinddel, ekskl. bolte. Huldel leveres med pinolskrue, gevinddel med M8 gevind. Montagesæt bestilles særskilt.
- Angiv centerafstand samt særskilt montagesæt ved bestilling.

Solid, straight pull handle, Ø19 mm. Designed by Friis & Molke Design, to match lever handle no. 1077

- Available in satin stainless steel (AISI 304).
- Supplied singly, thread or pin side, without fixing sets. Pin side supplied with grub screw, thread side supplied with M8 thread. Fixing sets should be ordered separately, see code scheme.
- Specify fixing centres and separate fixing sets when ordering.




• 61 •

CC	300 mm	650 mm
Ø19 mm	1577.02.GEV / HUL	1577.03.GEV / HUL

GEV = gevinddel. HUL = huldel
 GEV = thread side. HUL = pin side

Leveres i sæt – supplied in pairs

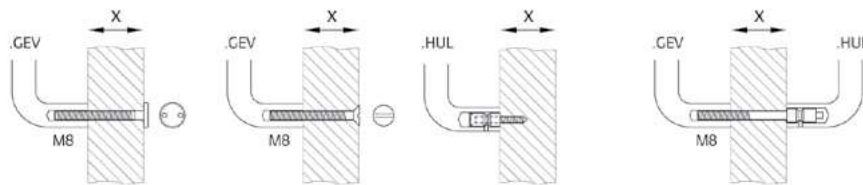

X =

10 - 22 mm	53002/MA*	74071/GA*	53040/SA*
23 - 30 mm	53002/MB	74071/GB	53040/SB
31 - 42 mm	53002/MC	74071/GC	53050T 53040/SC
43 - 54 mm	53002/MD	74071/GD	53050T 53040/SD
55 - 66 mm	53002/ME	74071/GE	53050T 53040/SE
67 - 78 mm	53002/MF	74071/GF	53050T 53040/SF
79 - 90 mm	53002/MG	74071/GG	53050T 53040/SG
90 - 102 mm			53050T 53040/SH

* Incl. tilbehør for glasmonter. Hul i glas: Ø12 mm. Alle montagesæt leveres inkl. løse skiver Ø28 x 2 mm. Husk at lægge disse til dørtykkelsen!

* Includes accessories for glass mounting. Bores in glass Ø12 mm. All fixing sets supplied incl. washers Ø28 x 2 mm. Remember to add these to the door thickness!

1580




■ 1580.00

Skydedørsskål, 175x65x2 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskrue 3,5x16 mm.

Backplate 175x65x2 mm with flush handle

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws 3,5x16 mm.



1590




■ 1590.00

Skydedørshank $\varnothing 16 \times 125$ mm, monteret på skilt $175 \times 65 \times 2$ mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer $3,5 \times 16$ mm.

Solid pull handle, $\varnothing 16 \times 125$ mm, fixed on backplate $175 \times 65 \times 2$ mm

- Drilled for 3.5 mm wood screws or M4 screws.
- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws $3,5 \times 16$ mm.



1591




■ 1591.00

Skydedørshank $\varnothing 16 \times 125$ mm, monteret på skilt $175 \times 170 \times 2$ mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer $3,5 \times 16$ mm.

Solid pull handle, $\varnothing 16 \times 125$ mm, fixed on backplate $175 \times 170 \times 2$ mm

- Drilled for 3.5 mm wood screws or M4 screws.
- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws $3,5 \times 16$ mm.



Tilbehør

		Side	Model
	Pictogram Ø52 x 4 mm roset	194	1145.05
	Pictogram 175 x170 x 2 mm.	195	1285.05
	Dørstop Ø25 mm, højde 45 mm	196	1600
	Dørstop Ø25 mm, højde 75 mm	196	1601
	Dørstop Ø25 mm, højde 10 mm	197	1602
	Dørstop Ø18 mm, højde 75 mm	198	1604
	Dørstop Ø18 mm, højde 75 mm med knage.	198	1605
	Brevskilt 315 x 80 x 2 mm	199	1608
	Dækskærm 325 x 80 mm	199	1609
	Ringettryk oval 65 x 30 x 8 mm.	200	1616
	Knage Ø55 mm	200	1819
	Gelænderholder Ø14 mm, med flad flange.	201	1822
	Gelænderholder Ø14 mm, med buet flange	201	1825

Accessories

		Page	No
	Pictogram Ø52 x 4 mm rose	194	1145.05
	Pictogram 175 x170 x 2 mm.	195	1285.05
	Door stop Ø25 mm, height 45 mm.	196	1600
	Door stop Ø25 mm, height 75 mm.	196	1601
	Door stop Ø25 mm, height 10 mm.	197	1602
	Door stop Ø18 mm, height 75 mm.	198	1604
	Door stop Ø18 mm, height 75 mm with hook	198	1605
	Letter plate 315 x 80 x 2 mm	199	1608
	Sprung internal letter flap 325 x 80 mm.	199	1609
	Doorbell button, oval 65 x 30 x 8 mm	200	1616
	Hook Ø55 mm	200	1819
	Handrail bracket Ø14 mm, with flat rose	201	1822
	Handrail bracket Ø14 mm, with curved rose.	201	1825

1145.X5.XXX



■ 1145.05.xxx
■ P1145.95.xxx

xxx = symbolnr., se tabel
xxx = no of symbol, see table.

■ rustfrit stål/stainless steel
■ messing/brass

Specialprodukt, produceres efter ordre

Pictogram ø 52x4 mm, dækroset med underskilt, huller for træskruer, ingen synlige skruer

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Alternative symboler kan laves efter forespørgsel.
- Pictogrammet leveres også til påklæbning.
- Leveres i stk. inkl. træskruer 3,5x13 mm.

Special, made to order

Pictogram on rose, ø52x4 mm. Drilled for wood screws, fixing centres 38 mm. Available with tape on the backside

- Available in satin stainless steel (AISI 304) or polished brass.
- Alternative symbols or text available on request.
- Supplied singly incl. wood screws 3,5x13 mm.

1285.05.XXX



■ 1285.05.xxx

xxx = symbolnr., se tabel
xxx = no of symbol, see table.

■ rustfrit stål/stainless steel

Specialprodukt, produceres efter ordre

Pictogram 175x170x2 mm. Huller for træskruer 3,5 mm eller M4 skruer


- Leveres som standard i matbørstet rustfrit stål (AISI 304)
- Symboler kan laves med og uden ramme.
- Alternative symboler kan laves efter forespørgsel.
- Pictogrammet leveres også til påklæbning uden skruenhuller.
- Leveres i stk. inkl. træskruer 3,5x13 mm.

Special, made to order

Pictogram on plate, 175x170x2 mm. Drilled for 3.5 mm wood screws or M4 screws

- Available in satin stainless steel (AISI 304)
- Symbols can be supplied with or without frames.
- Alternative symbols or text available on request.
- Available without screw holes, with tape on the backside.
- Supplied singly incl. wood screws 3,5x13 mm.

Interesseret i andre pictogrammer end vist herunder. Spørg salgsafdelingen..
/ Interested in other pictograms than shown. Contact sales department.

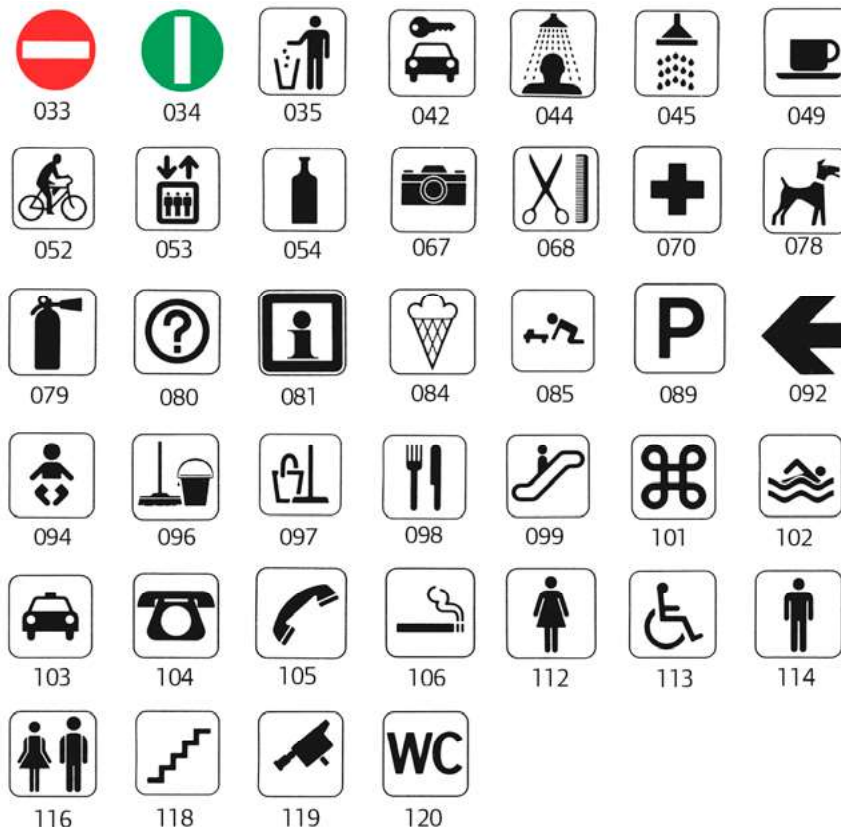

1600




■ 1600.00
■ P1600.90

Dørstopper, ø25 mm rør, højde 45 mm, med sort gummienslag, flange ø50x3 mm, med skjult montering for gulv.

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Leveres i stk. inkl. plug og skrue.

Door stop, ø25 mm, height 45 mm, with black rubber buffer, rose ø50x3 mm. Drilled for ø6 mm screw

- Available in satin stainless steel (AISI 304) or polished brass.
- Supplied singly incl. plug and screw.



■ rustfrit stål/stainless steel
■ messing/brass

1601




■ 1601.00
■ P1601.90

Dørstopper, ø25 mm rør, højde 75 mm, med sort gummienslag, flange ø50x3 mm, med skjult montering for gulv

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Leveres i stk. inkl. plug og skrue.

Door stop, ø25 mm, height 75 mm, with black rubber buffer, rose ø50x3 mm. Drilled for ø6 mm screw

- Available in satin stainless steel (AISI 304) or polished brass.
- Supplied singly incl. plug and screw.



■ rustfrit stål/stainless steel
■ messing/brass

1602



■ 1602.00

Dørstopper, ø25 mm, med sort gummianslag og hul for træskrue

- Leveres som standard i matforniklet messing.
- Leveres i stk. inkl. skrue.

Door stop, ø25 mm, with black rubber buffer, drilled for wood screw

- Available in mat nickel plated.
- Supplied singly incl. screw.



• 10 •

1604




■ 1604.00
■ P1604.90

Dørstopper, ø18 mm rør, højde 75 mm, med sort gummienslag, flange ø28x3 mm. Hul ø5 mm for skrue

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Leveres i stk. inkl. plug og skrue.

Door stop, ø18 mm, height 75 mm, with black rubber buffer, rose ø28x3 mm. Drilled for ø5 mm screw

- Available in satin stainless steel (AISI 304) or polished brass.
- Supplied singly incl. plug and screw.



■ rustfrit stål/stainless steel
■ messing/brass

1605




■ 1605.00

Dørstopper, ø18 mm rør, med knage. Højde 75 mm, med sort gummienslag, flange ø28x3 mm. Hul ø5 mm for skrue


- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. plug og skrue.

Door stop with hook, ø18 mm, height 75 mm, with black rubber buffer, rose ø28x3 mm. Drilled for ø5 mm screw

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. plug and screw.



1608

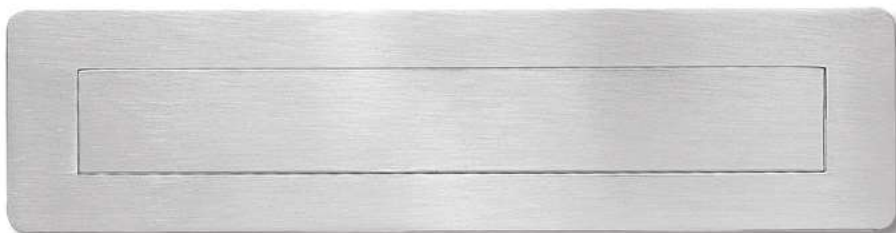

■ 1608.00
■ P1608.90


**Brevskilt, 315x80x2 mm, med påsvejste M4 gevindstudse for skjult montage.
Åbning 265x38 mm**

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Leveres i stk. inkl. M4x84 mm skruer.
- For montering, se side 394.



**Letter plate, 315x80x2 mm, with M4 bushes attached for concealed fixing.
Aperture 265x38 mm**

- Available in satin stainless steel (AISI 304) or polished brass.
- Supplied singly incl. M4x84 mm screws.
- For installation, see page 394.



■ rustfrit stål/stainless steel
■ messing/brass

1609



■ 1609.00
■ P1609.90


Dækskærm, fjederbelastet, 325x80 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304) eller poleret messing.
- Leveres i stk. inkl. træskruer.
- For montering, se side 394.
- Til indvendig brug



Sprung internal letter flap, 325x80 mm

- Available in satin stainless steel (AISI 304) or polished brass.
- Supplied singly incl. wood screws.
- For installation, see page 394.
- For interior use



■ rustfrit stål/stainless steel
■ messing/brass

1616




■ 1616.086

Ringtryk, oval roset 65x30x8 mm, ingen synlige skruer, underroset med huller for træskruer

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. træskruer 3,5x16 mm.

Doorbell button, oval rose cover 65x30x8 mm, with concealed screws, rose drilled for wood screws

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. wood screws 3,5x16 mm.



1819




■ 1819.00

Knage ø10 mm, med skive ø22x2 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. plug og skrue.

Hook ø10 mm, with washer ø22x2 mm.

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. plug and screw.



1822




■ 1822.00

Gelænderholder ø14 mm, massiv, med flange ø40x3 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. M8x70 mm. bordskrue.

Handrail bracket, ø14 mm, solid on rose ø40x3 mm

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. M8x70 mm fixing screw.



1825



■ 1825.00

Gelænderholder ø14 mm, massiv, med flange ø40x3 mm

- Leveres som standard i matbørstet rustfrit stål (AISI 304).
- Leveres i stk. inkl. M8x70 mm. bordskrue.

Handrail bracket, ø14 mm, solid on rose ø40x3 mm

- Available in satin stainless steel (AISI 304).
- Supplied singly incl. M8x70 mm fixing screw.

