

Hardware & Ironmongery

for the Built Environment

MF SERVICES

mfservices.ie

HARDWARE & IRONMONGERY

Contents

Welcome 03
Ironmongery 04
Randi 05
CF Møller 06
AART 08
Friis & Moltke 09
Lars Vejen 10
Moom 12
Pull Handles 13
Unique Designs 15
Line 18 17
Accessories 19
Sanitary Ware — Novo 21
Sanitary Ware — Cone 23
ECO-Schulte 24
Door Handles 25
System Technology 27
Lock Systems 28
Master Keying & Access 30
Overhead & Surface Mounted 31
FTS III Free Swing 32
Concealed Closers 33
Heavy Duty Concealed 34
Crossbar & Touch Bar Systems 35
Guardian Series Panic Bars 36
Load Bearing & Concealed 37
Hotel Locks 38
Automatic Doors 39
Swing Door Operators 40
Sliding Doors 41
Specialist Doors — Hermetic & Airflow Control 42
Specialist Doors — GRP & Steel Fire Resistant 43

CASE STUDIES
Griffin Point, Dublin 45
Old Buckley Building, Maynooth University 46
Bon Secours Hospital, Cork 47
Surgical Hubs — Cork, Waterford & Limerick 48
Notes 49
Let's talk 52

MF SERVICES

WELCOME

Opening Doors to Possibilities

For over 40 years, MF Services has supplied and specified premium door hardware for commercial, healthcare, hospitality, and institutional projects across Ireland — sourced exclusively from leading European manufacturers and backed by our nationwide service team.



MF SERVICES

Premium European Hardware

Comprehensive range sourced from Randi, ECO-Schulte, Dormakaba, Consort, and Omnitec.

Fully Integrated Solutions

Complete compatibility with MF Services' doors, security, and automation systems.

Expert Specification

In-depth expertise in matching the right products to every door type and application.

Nationwide Support

Installation, preventive maintenance, and reactive emergency response available across Ireland.





ABOUT

Ironmongery

Precision-specified and sourced from leading European manufacturers — MF Services supplies a complete range of ironmongery including Randi, ECO-Schulte, Dormakaba, and Consort, matched to every door type and application across your project.

Randi

Scandinavian designer handles, pull handles, accessories, and sanitary ware. MF Services is Randi's sole Premium Partner in Ireland.

ECO-Schulte

Handles, locks, closers, panic hardware, hinges, and cylinders. MF Services is ECO-Schulte's only Irish partner.

Dormakaba

Floor springs, swing door operators, and panic hardware for heavy-duty and hold-open applications. Global manufacturer trusted for high-cycle commercial specifications.

Consort

Lock systems, floor springs, and hinges. CHL 725 lock series, CFS544.DA floor spring, and CBH ball-bearing hinges — CE-marked and fire-rated across the range.



ABOUT

Randi

Designed by architects for architects since 1948 — Randi has been at the forefront of innovative Scandinavian hardware design for over 75 years. Through collaborations with notable architects and design houses, they have created a unique range of handles, pull handles, accessories, and sanitary fittings that complement any design project.

Randi provides a 70-year design guarantee and a 25-year operational guarantee on all lever handles.

Sole Premium Partner

MF Services holds stock of the main Randi-Line ranges as well as samples of their more bespoke products.

Materials & Finishes

All fittings manufactured from high-grade stainless steel or brass, available in a range of PVD-coated finishes.

Full Brochures & Data Sheets

Available at mfservices.ie

RANDI

CF Møller

CLASSIC RANGE

Timeless award-winning designs from Danish architects CF Møller. Featuring the flagship 1060, the Slim Profile 1066, and the ergonomic Komé range in polished and sandblasted finishes.



LINE 1060

Classic Slim Profile lever. ø16mm bright polished brass. Optional PVD coated finishes.



LINE 1066

ø16mm solid satin stainless steel (AISI 304). Slim profile. Supplied in pairs with 8×8mm and 9×9mm spindles.

RANDI

CF Møller

KOMÉ RANGE



LINE 1073 KOMÉ

Award-winning ergonomic lever. ø19mm stainless steel with black PVD coating. Optional PVD finishes available.



LINE 1073.00 RAW

Sandblasted raw finish. ø19mm stainless steel (AISI 304) for industrial design expression.

FIXING SYSTEM

3-point Randi Plug fixing on concealed rose. Frictionless collar bearing engineered for long operational life. Compatible with all standard door thicknesses.

FINISHES

High-grade stainless steel or brass with PVD-coated options including bronze, black, and custom colours.

SCAN HERE FOR
full product range

MF SERVICES

RANDI

AART

WING RANGE

The Randi-Line® Wing 1074 by AART Designers — an award-winning lever handle reminiscent of an aircraft wing. Uncluttered architectural profile with soft ergonomics, available in three finishes with matching escutcheons and thumb turns.



WING 1074 PVD

ø19mm Wing lever in satin stainless steel. Escutcheons and thumb turns available in matching finish.



WING 1074 SATIN

ø19mm Wing lever in bright polished brass. Escutcheons and thumb turns available in matching finish.



WING 1074 BRASS

ø19mm Wing lever with copper or brass PVD coated stainless steel finish.

FIXING SYSTEM

3-point Randi Plug fixing on concealed rose. Frictionless collar bearing engineered for long operational life. Compatible with all standard door thicknesses.

FINISHES

Satin stainless steel, bright polished brass, or PVD-coated stainless steel in copper and brass.

RANDI

Friis & Moltke

LINE RANGE

Sculptured and colourful lever handles that create powerful design effects. The Randi-Line® Grata delivers welcoming ergonomics; the SQUARE demonstrates dramatic material contrast; the Grata Oak brings a warm timber accent.

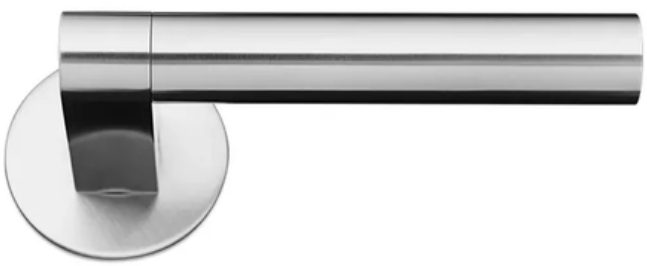

LINE 1077 GRATA

Combination of satin stainless steel and black composite. Distinctive architectural profile.



LINE 1077.EO

Grata with ø19mm stainless steel neck and natural oak lever. Warm timber accent.



LINE 1075 SQUARE

ø19mm stainless steel with black POM. Bronze or coloured PVD-coated finishes available.

FIXING SYSTEM

3-point Randi Plug fixing on concealed rose. Frictionless collar bearing engineered for long operational life. Compatible with all standard door thicknesses.

FINISHES

Stainless steel with black POM, natural oak, or PVD colour options across the Grata range.

SCAN HERE FOR
full product range

MF SERVICES

RANDI

Lars Vejen

The award-winning Nordic Straight by Lars Vejen — a composition of simple geometric shapes and natural materials. Birch bark inserts provide natural resistance to bacteria, ideal for healthcare and hospitality applications.



NORDIC 1068

ø19mm satin stainless steel, black PVD coated,
with birch bark insert.



WINDOW 1768

ø14mm satin stainless steel window handle.
Designed to match levers 1068 and 1078.

RANDI

Lars Vejen



NORDIC 1078.20

ø19mm satin stainless steel with birch bark insert. Antibacterial natural material.



BIRCH BARK MATERIAL

Natural birch bark with high resistance to bacteria. Renewable material choice for healthcare and hospitality.

FIXING SYSTEM

3-point Randi Plug fixing on concealed rose. Frictionless collar bearing engineered for long operational life. Compatible with all standard door thicknesses.

FINISHES

Satin stainless steel or black PVD coating. Birch bark insert on lever section.

SCAN HERE FOR
full product range

MF SERVICES



INNOVATIONSPREIS ARCHITEKTUR + BAUWESEN 2023

RANDI

MOOM

MOOM by Danish architect Bjarne Hammer — the award-winning handle made from a material never before seen in door hardware. Crushed mussel shells, a byproduct of food production, bound with recycled plastic into a marble-like surface where no two handles are alike.

MATERIAL

Approx. 90% crushed mussel shells combined with recycled plastic bottles and biomaterial. A waste-stream composite, fully recyclable.

DESIGN

By Danish architect Bjarne Hammer. Homogeneous, marble-like surface structure with natural variation — every handle is unique.

AWARD

AIT Architecture + Construction Innovation Award, BAU 2023. Selected from 136 innovations across 70 companies.

SUSTAINABILITY

Built from byproducts of food production and recycled plastic waste. Supports project CO_2 reduction targets on the path to 2030.

RANDI

Pull Handles

Scandinavian-designed pull handles matched to the Randi lever range. Each pull handle is by the same architect behind its matching lever — CF Møller (1573), AART (1574), and Friis & Moltke (1577) — delivering full aesthetic continuity across the door set.



PULL 1573

300/600mm ø19mm stainless steel. Designed by AART to match Wing lever 1074.



PULL 1577

300/600mm ø19mm stainless steel. Designed by Friis & Moltke to match Grata lever 1077.



PULL 1574

300/600mm ø19mm stainless steel. Designed by CF Møller to match Komé lever 1073.



PULL 1552

ø19mm satin stainless steel (AISI 304). Face fixing with ø52×4mm rose covers and concealed screws.

SCAN HERE FOR
full product range

MF SERVICES

RANDI

Pull Handles



PULL 1550

ø16mm satin stainless steel (AISI 304).
Face fixing with ø45×3mm rose covers and concealed screws.

LENGTHS

Standard 300mm and 600mm lengths.
Custom lengths available on request.

FINISHES

Solid ø19mm stainless steel throughout.
Bright polished or satin finish.

MOUNTING

Face fixing with rose covers and concealed screws, matched to each handle diameter.
Supplied with fixing sets for all standard door types.

Unique Designs

A curated selection of design-led Randi-Line® handles. Evergreen grows from the door leaf like a sprout; Spira balances equilibrium and simplicity; the Randi-Line 18 PVD range delivers vibrant colour and wear resistance for high-traffic environments.



EVERGREEN

Balanced ergonomic design. Refined finish emphasising equilibrium and ease of use.



LINE 18 PVD

Wear- and corrosion-resistant PVD-coated stainless steel. Vibrant colour finishes.

SCAN HERE FOR
full product range

RANDI

Unique Designs

SPIRA

Curved profile growing from the door leaf. Geometrically clean, simple, precise architectural appearance.









COLOUR OPTIONS

Black, copper, and brass PVD coated finishes available across the range.

APPLICATIONS

Specified for offices, healthcare, hospitality, and residential projects where design-led hardware is required. PVD options for high-traffic environments.

FINISHES

Stainless steel with PVD-coated options for high-traffic environments requiring wear resistance and colour flexibility.

RANDI

Line 18

A complete series of lever handles and fittings in a pleasing, functional design at competitive entry-level pricing. Most products available in black PVD coated finishes; featured door knobs pair with any Line 18® lever.



RETURN 7020

ø18mm hollow satin stainless steel. Also in black PVD coated finish.



MITRED 7024

ø18mm hollow satin stainless steel. Also in black PVD coated finish.



STRAIGHT 7021

ø18mm hollow satin stainless steel. Also in black PVD coated finish.

SCAN HERE FOR
full product range

RANDI

Line 18

T-SHAPE 7065

ø18mm hollow satin stainless steel. T-shaped curved profile.









DOOR KNOBS

ø50mm satin stainless steel. Standard (7080) and narrow-profile (7085) variants available.





COUPÉ 7090

ø19mm hollow satin stainless steel (AISI 304). Classic coupé-shaped profile.

Accessories

Add the finishing touches to your project with complementary Randi accessories. Door roses, plates, doorstops, letter plates, and handrail brackets — designed to continue the elegant Scandinavian theme throughout the specification.



DOOR ROSE 1145.05

ø52×4mm satin stainless steel or polished brass. Alternative symbols or custom text available.



DOOR PLATE 1285.05

ø52×4mm satin stainless steel or polished brass. Alternative symbols or custom text available.



LETTER PLATE 1608.00

315×80×2mm, aperture 265×38mm. Satin stainless steel or polished brass.



H-STYLE LETTER PLATE P3614/3622

375×90mm. Solid bright polished brass

SCAN HERE FOR
full product range

RANDI

Accessories



DOORSTOP 1062.00

ø25mm matt nickel plated with black rubber buffer.



WALL/FLOOR DOOR STOP 1600/1601

ø25×45/75mm with black rubber buffer. Stainless steel or polished brass.



WALL DOOR STOP 7604

ø19×77mm with black rubber buffer. Satin stainless steel or black PVD.

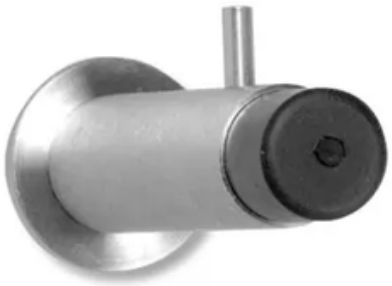

WALL DOOR STOP WITH HOOK 1605

ø28×75mm with black rubber buffer. Satin stainless steel.

SOLID HANDRAIL BRACKET 1825

ø14mm on ø40×3mm rose. Satin stainless steel.



RANDI

SANITARY WARE

Novo

Novo-Line® is a range of functional, solid bathroom fittings originally designed for hospitals. Toilet roll holders, waste bins, dispensers, hooks, and toilet brushes — engineered in stainless steel for healthcare and hospitality environments.

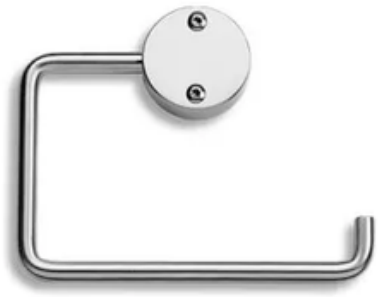

TOILET ROLL HOLDER 2976.00

ø8mm, rose ø40×13mm. Satin stainless steel.

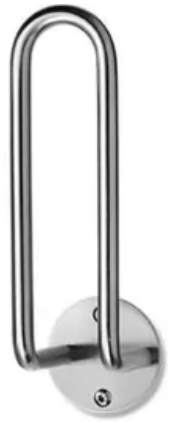

SPARE TOILET ROLL HOLDER 2975.00

ø8mm, rose ø45×3mm. Satin stainless steel.



WALL MOUNTED TOILET BRUSH 2970.00

ø8mm hanger, 40×143×3mm backplate. Porcelain holder, black nylon brush head.



SINGLE HOOK RACK 2980.00

ø8mm hook with ø40×3mm rose. Satin stainless steel.

RANDI

SANITARY WARE

Novo



2-HOOK RACK 2981.00

ø8mm hooks with 143×40×3mm backplate. Satin stainless steel.



DETACHABLE WASTE BIN 2978.X00

300×300×190mm. 17 litres. Painted finish optional.



PAPER TOWEL DISPENSER 2974

300×300×100mm. Satin stainless steel. Lockable option.



SOAP & HAND SANITISER DISPENSER 2972

100×110×300mm. Touch-free. Lockable option.

DETACHABLE GLOVE DISPENSER 2990.X00

300×150×100mm. Painted finish optional.



Cone

CONE HOOK 1880.XXX

ø28mm satin stainless steel with washer.
Optional oak washer and rubber.





CONE TOILET ROLL HOLDER 1876.00

ø8mm, rose ø39mm. Satin stainless steel.
Black, copper, and brass PVD coated options.

CONE SPARE TOILET ROLL HOLDER 1875.00

ø8mm, rose ø39mm. Satin stainless steel. Black, copper, and brass PVD coated options.

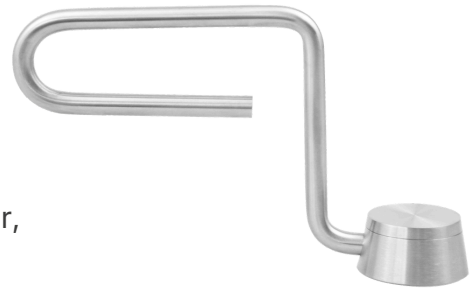



ABOUT

ECO-Schulte

System technology for the door since 1955 — ECO-Schulte is a family-owned German manufacturer engineering fully coordinated door hardware. Their handle, closer, lock, panic, hinge, and cylinder ranges are designed and tested as a complete certified system, removing the specification risk that comes with mixing components from different sources.

All product groups are manufactured at the company's facility in Menden, North Rhine-Westphalia, and certified to the relevant EN standards for use across commercial, healthcare, education, and institutional projects.

Sole Irish Partner

MF Services holds stock of the main ECO-Schulte ranges in Cork and provides full specification support across handles, closers, locks, and panic devices.

Certifications & Standards

EN 1906 Grade 3 & 4 (handles). EN 1154 (closers). EN 12209 (locks). EN 179 (escape). EN 1125 (panic). Fire-rated certified options across the range.

Full Brochures & Data Sheets

Available at mfservices.ie

ECO-SCHULTE

Door Handles

System technology for the door. ECO-Schulte is a German manufacturer specialising in fully coordinated door hardware — handles, closers, locks, panic devices, hinges, and cylinders — engineered to work together as a complete system.

All lever handles are 20mm Ø stainless steel, mounted on a friction-bearing rose with 3-point fixing and M5 bolt-through. Certified to EN 1906 Grade 3 and Grade 4 for daily commercial and institutional use, with options approved for fire-rated doors.

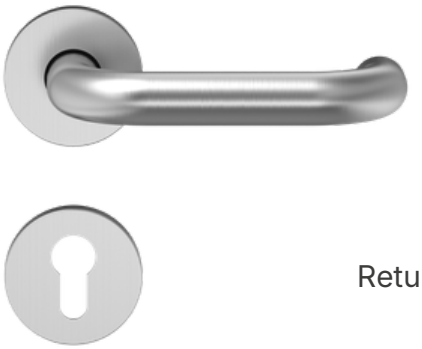

D110 / D120

Return-to-door lever. Available with straight or ball-end return.

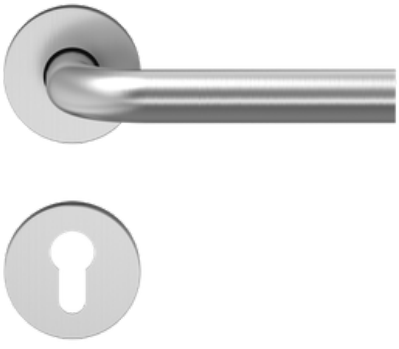

D210

L-shaped lever profile.

SCAN HERE FOR
full product range

ECO-SCHULTE

Door Handles

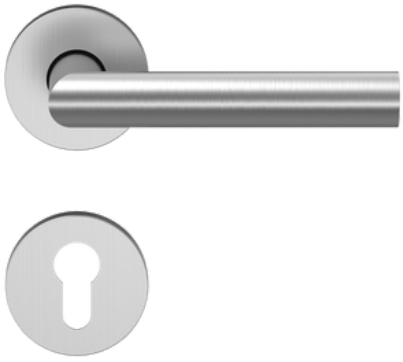

D310

Mitred lever profile.

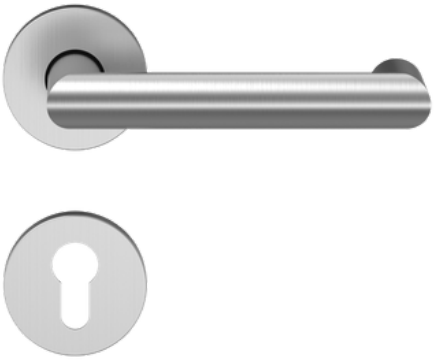

D330

Mitred return lever.

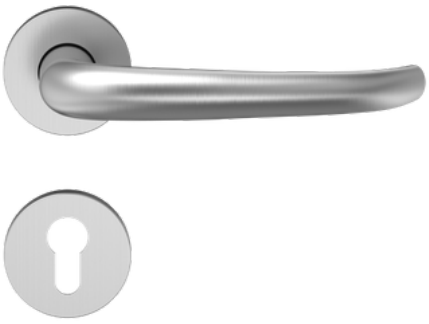

D410 CURVED

Curved lever profile.

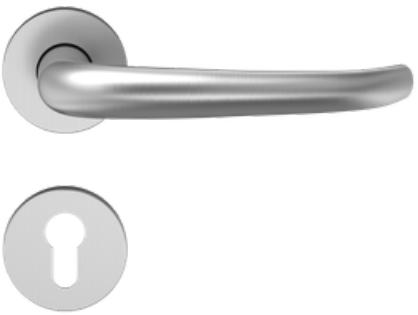

D490

Oversized return lever.

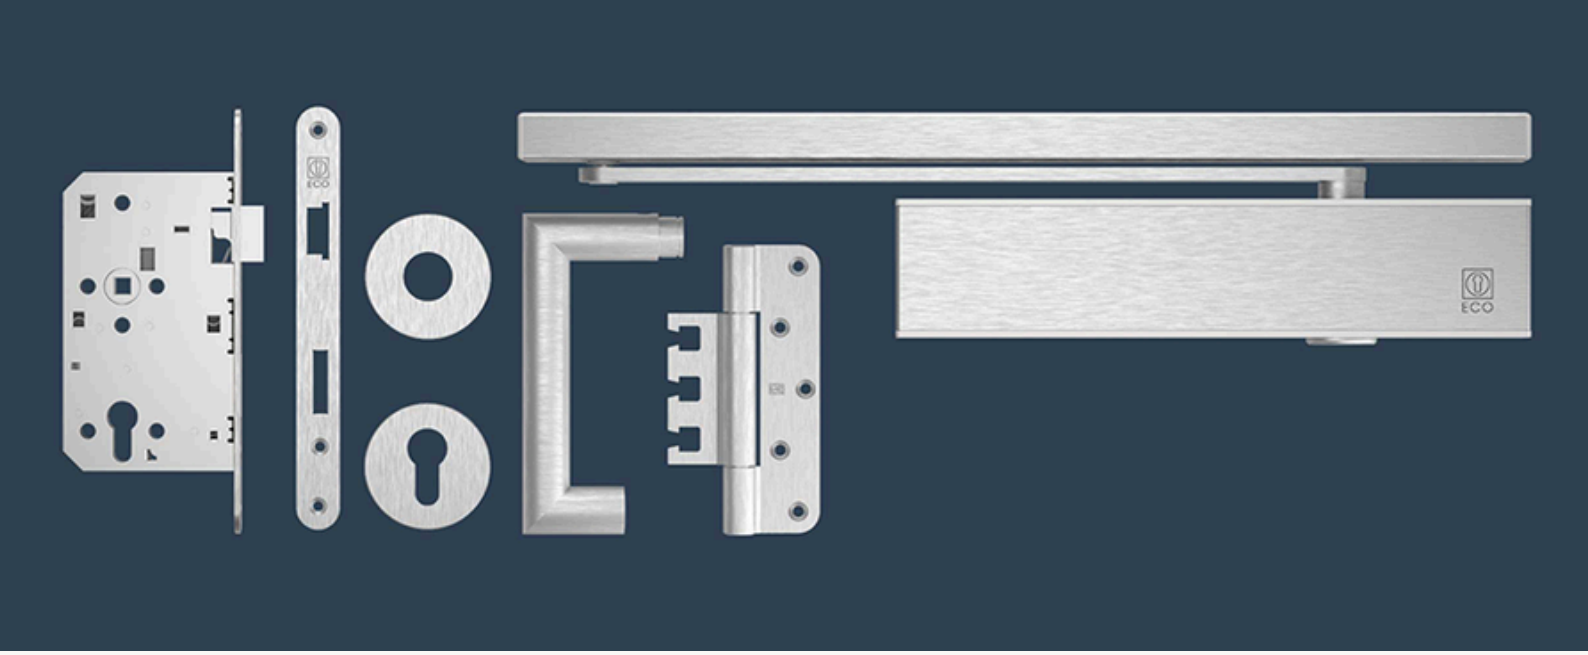

ECO-SCHULTE

System Technology

The complete ECO-Schulte handle system — designed to work as a coordinated whole. Every handle, escutcheon, rose, and thumb turn is engineered for full compatibility across fire-rated and standard door assemblies. EN 1906 Grade 3 and 4 tested across the range.

FIXING PLATFORM

OKL Magis bearing rose and OGL Click mounting systems. M5 bolt-through fixings with a consistent installation footprint across the range.

FIRE-RATED

Fire-rated variants available across the handle range. Suitable for EN 1634 rated door assemblies.

EN 1906 GRADE 3 & 4

Grade 3 and 4 tested. Duty ratings suitable for high-frequency commercial and institutional use.

MATERIALS

ø21mm stainless steel throughout. Marine-grade options available for exposed or coastal applications.

FINISHES

Satin stainless steel base finish. PVD-coated options in bronze, black, and RAL variants.

CYLINDER INTEGRATION

Euro-profile cylinder compatible. Master keying available through separate cylinder specification.

ECO-SCHULTE

Lock Systems

Severe-duty lock cases, CE marked and EN 12209 compliant. Suitable for fire-rated doors. EN 179 escape and EN 1125 panic variants across single and double-leaf configurations.



GBS 81

Severe-duty sash and bathroom locks. EN 12209. Fire-rated.



GBS 98

Panic counter lock for double-leaf doors. EN 179 / EN 1125. Fire-rated.

GBS 90

Auto-deadbolting escape and panic. EN 12209 / EN 179 / EN 1125.



CONSORT

Lock Systems

CE marked and EN 12209 compliant. Suitable for fire-rated doors. EN 179 escape variants available in sash-lock and night-latch configuration.



CHL 7250 EURO SASH LOCK

CE marked. EN 12209 compliant. Suitable for fire-rated doors. Radius or square face plate options.



CHL 7251 LATCH

CE marked. EN 12209 compliant. Fire-rated door suitable. Available for un-sprung handles.



CHL 7252 DEADLOCK

CE marked. EN 12209 compliant. Fire-rated door suitable. Radius or square face plate options.



CHL 7253 BATHROOM LOCK

CE marked. EN 12209 compliant. Fire-rated door suitable. Complete privacy set.

SCAN HERE FOR
full product range

MF SERVICES

Master Keying & Access

Compatible with padlocks, switch gear riser doors, gates, and other euro cylinder locks. Optional emergency function and bump-proof designs available.

RS6 MASTER KEY SYSTEM

6-pin anti-drilling. 6 spring-loaded tumblers for anti-picking. Brass housing, nickel silver key. EN 1303/2015. Suitable for individual, multiple, and sub-master keyed systems. Optional emergency function and increased anti-drill/anti-pull.





SP6 RESTRICTED PROFILE

High-security restricted master key system with Softline profile. 6-pin anti-drill. Brass housing, nickel silver key. Optional emergency function, increased anti-drill/anti-pull, and bump-proof design.

Overhead & Surface Mounted

Each closer is CE marked to EN 1154, strength template adjustable, with infinitely adjustable speed, and suitable for fire-rated doors. Available in polished or satin stainless steel, PVD coated, and RAL colour finishes.



ECO TS 62 CAM ACTION

EN 2–5/6. Fire doors up to 1400mm. Back-check function. Door or frame mounted.



ECO TS 41

EN 2–4. Fire doors up to 1150mm. Back-check function. Door or frame mounted (one unit type).



ECO TS 50

EN 2–5/6. Fire doors up to 1250/1400mm. Back-check function. Door or frame mounted.



ECO TS 14

EN 2–4. Fire doors up to 1150mm. Door or frame mounted in one unit type.

SCAN HERE FOR
full product range

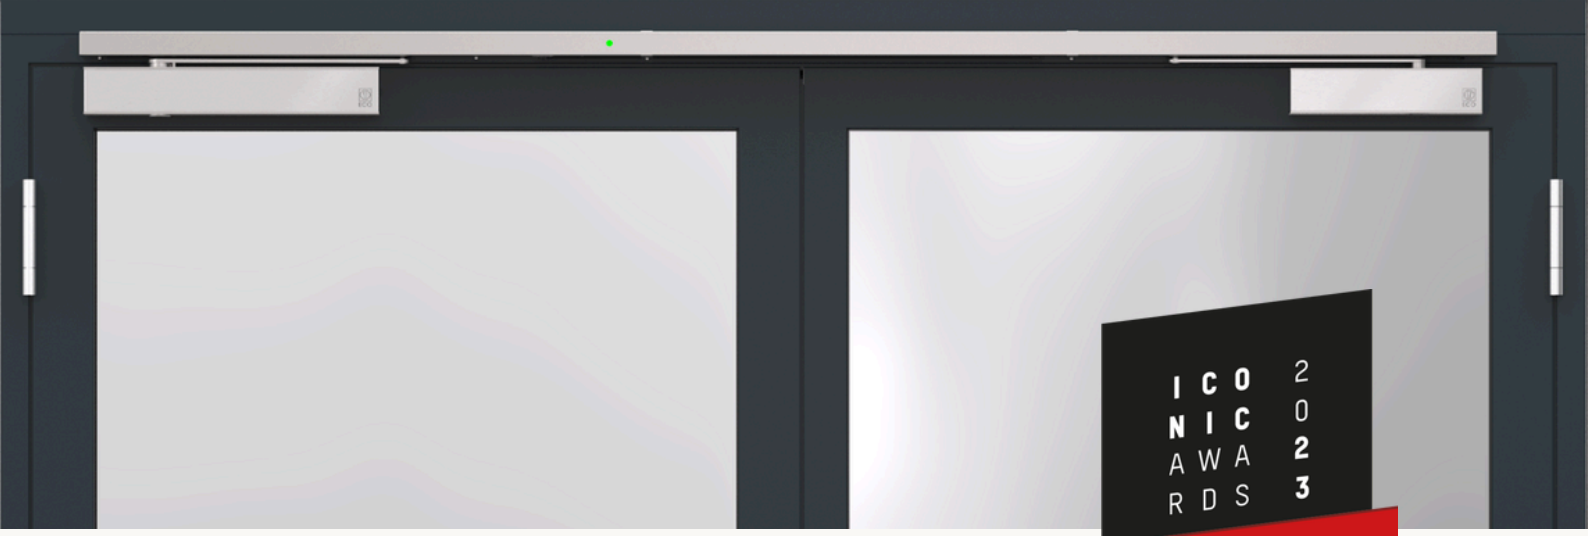

DOOR CLOSERS

FTS III Free Swing

The ECO FTS III free swing door closer — doors open with minimal force while retaining certified self-closing for fire and smoke assemblies. Designed for environments where ease of access is critical, from hospitals and care facilities to schools and residential entrances.

FREE SWING FUNCTION

Free swing active from 1° opening angle. Doors operate with minimal force for users with limited strength or mobility.

MOUNTING

Covers all four assembly positions: door leaf and head mounting, hinge and opposite-hinge side. Opening angle up to 180°.

CERTIFICATION

EN 1155 and EN 14637. Suitable for fire and smoke door assemblies.

DESIGN AWARD

ICONIC AWARD 2023: Innovative Interior. Recognised for uniting accessibility with minimalist design.

VARIANTS & FINISHES

Single closing body suits DIN left and right. Optional stainless steel (V2A) full cover. Double-leaf systems via SR III slide rails.

APPLICATIONS

Hospitals, care and retirement facilities, kindergartens, and residential entrances requiring reduced opening force.

Concealed Closers

ECO ITS Multi-Genius fits doors to 1250mm with ≥40mm depth in a slim 30mm profile. ECO ITS 420 is specifically designed for lightweight doors up to 1100mm.



ECO ITS 420

EN 2–4. Doors up to 1100mm. Specifically designed for lightweight doors. Max opening 120°. DIN left and DIN right.

ECO ITS MULTI-GENIUS

EN 3. Doors up to 1250mm with ≥40mm depth. 30mm slim design. Max opening 140–160°. Invisible mounting with no additional reinforcement required.



SCAN HERE FOR
full product range

FLOOR SPRINGS

Heavy Duty Floor Springs

Dorma BTS 75 and BTS EMB 80 for standard and hold-open applications. Consort CFS544.DA for external doors and heavy traffic. All fire-resistant door suitable.

DORMA BTS 75

Variable power floor spring. Doors up to 1250mm and 160kg. Adjustable closing force. DIN left and DIN right. Single and double action, fire-resistant doors.





DORMA BTS EMB 80

Electro-magnetic hold-open floor spring between 75° and 180°. Doors up to 1400mm and 300kg. Variable closing speed and latching action.

CONSORT CFS544.DA

Double sprung heavy duty floor spring. Doors up to 1100mm and 150kg. Adjustable closing and latching. External doors and heavy traffic areas.



PANIC HARDWARE

DORMA

Crossbar & Touch Bar Systems

Each device CE marked to EN 1125 and suitable for fire-rated doors. Available in satin stainless steel and PVD coated finishes.

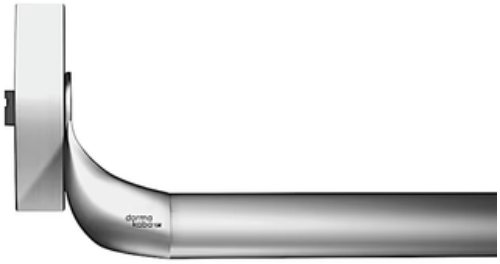

PHA 2000 CROSSBAR

Single and double point horizontal latching. Double point vertical latching. Single or combined sets for double doors up to 1300mm.



PHB 3000 TOUCH BAR

Single and double point horizontal latching. Double point vertical. Door leaves up to 1300mm.

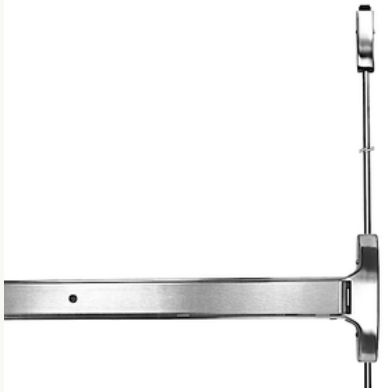

P 9000 SEVERE TOUCH BAR

Stainless steel severe touch bar. Single point horizontal, double point vertical. Door leaves up to 1300mm.



P 9000MLR MOTORISED

Motorised stainless steel severe touch bar. Unlocked electronically via access control. Doors up to 1220mm.

SCAN HERE FOR
full product range

MF SERVICES

PANIC HARDWARE

ECO-SCHULTE

Guardian Series Panic Bars

Suitable for EN 1634 fire-rated doors. Available in aluminium, satin stainless steel, RAL colours, and PVD coated finishes.

EPN 900

Profile, steel, and wooden fire doors up to 1500mm. Single and double doors. Large sturdy anti-vandalism handle.



EPN 950



Narrow profile smoke and fire protection doors up to 1500mm. Extra-wide bend for double door clearance and electronic cylinder mounting.

EPN 2000

Profile, steel, and wooden doors. Smoke/fire protection up to 1250mm (profile), 1500mm (solid). DIN left and right. Wide escape route via low overall projection.



Load Bearing & Concealed

Our range includes ball bearing, thrust bearing, concealed hinges, and specialist high-load hinges. All tested and certified to EN 1935.



ECO HORIZON OBN-14

Round C-Shape concealed hinge. Load up to 200kg. Laser-welded knuckle. Maintenance-free concealed ball bearing. EN 1935 Grade 14+. DIN left/right. Invisible axis.



CONSORT CBH102–CBH105

Two-ball bearing butt hinge. Load up to 120kg. Independently tested to 200,000 cycles. EN 1935 Grade 13. Fire door suitable.

OPTIONS

Radius corner and security stud variants available on Consort. Consult specification team for high-frequency and heavy-load applications.

STANDARDS

All hinges tested and certified to EN 1935. Fire door suitable across the range. Grade selection matched to door leaf weight and cycle frequency.

SCAN HERE FOR
full product range

OMNITEC

Hotel Locks



Specified for hospitality, healthcare, education and residential projects across Ireland. Omnitec electronic locks combine Bluetooth, MIFARE proximity and online connectivity in a single integrated platform.

EI 30 fire rating where applicable, IP54 to IP65 ingress protection, stainless steel AISI 304 or 316 construction throughout.

EVO

Concealed electronic lock. Bluetooth, MIFARE and online opening. Hidden electronics for design-led projects.

OS SLIM

Slim-profile escutcheon. Bluetooth, MIFARE, code and online opening.

GAUDI

Reliable mid-range lock with MIFARE proximity. Best quality-to-cost ratio in the range.

FIT-IN

Retrofit upgrade. Replaces magnetic, chip or RFID locks while keeping the existing mortise.

X-RP2 CYLINDER

Electronic Euro cylinder for retrofitting mechanical doors. IP65. Anti-drill and anti-snap protection.

FREEPAD KEYPAD

Wireless numeric keypad. Pairs with X-RP2 or Bluetooth locks for code-based entry.

INTEGRATION & SUPPORT

All Omnitec locks integrate with OS Access cloud management and the UpKey app. PMS compatibility includes Opera and Prestige. Backed by MF Services' nationwide installation and support team.



AUTOMATIC DOORS

OVERVIEW

Simple Barrier-Free Access

All installations to EN 16005 standard. Members of ADSA with full PSA licence as required by Irish law. Nationwide supply, install, and maintenance.

DOOR TYPES

Sliding, telescopic, swing, and specialist doors for healthcare and hygienic zones. Aluminium thermally broken, slim frame, fire-rated leaves, full toughened glass.

OPERATORS

Intelligent operators by Sesamo and ECO-Schulte. Silver and PVD coated finishes. See following pages for the full swing and sliding operator range.

COMPLIANCE

All installations to EN 16005 standard. Members of ADSA. Full PSA licence as required by Irish law.

SERVICE

Nationwide supply, install, and maintenance. Site visits and surveys, consultation and scheduling, 24/7 preventive and reactive maintenance.

AUTOMATIC DOORS

DORMAKABA

ED Series & Door Control

Automated and manual door control from dormakaba. ED-series operators cover doors up to 400kg, installed and commissioned to EN 16005; the TS 73 EMF adds electromagnetic hold-open and free swing control for fire and smoke doors.

ED 100

Swing door operator for doors up to 160kg. Full Energy and Low Energy variants. Radar, push-pad, or access control activation. Suitable for escape routes.





ED 250

Heavy-duty operator for doors up to 400kg. Wind Load Control maintains constant speed on exposed doors. Installed and commissioned to EN 16005.

TS 73 EMF

Electromagnetic hold-open with free swing option. Hold-open adjustable 75°–180°. Doors up to 1400mm, single and double sets. EN 1155, Certifire approved.





AUTOMATIC DOORS

SWING

Swing Door Operators

ECO ETS 73 operators automate swing doors up to 400kg in Full Power or Low Energy modes. The ETS 42 delivers contact-free accessible WC systems, tested to 1M+ cycles.

ECO ETS 73

Electric swing door operator for doors up to 400kg. Full Power and Low Energy modes with Push & Go. Wind-load compensation for exposed and external doors.





ECO ETS 42

Compact contact-free door automation, from accessible WCs to interior doors. Up to 150kg, tested to 1M+ cycles. Sensor buttons with locked/unlocked status rings.



AUTOMATIC DOORS

PORTALP

Sliding Doors

Barrier-free access engineered for high-traffic commercial, healthcare, and hospitality projects. Portalp sliding, telescopic, and break-out systems cover clear openings up to 4.2 metres. EN 16005 compliant across the range.

PORTALP SLIDING

Single and double-leaf sliding systems with side lights. Openings from 700mm up to 4.2m, panels up to 2 × 100kg. Brushless drive with connected control.

PORTALP BREAK-OUT

Leaves and side lights pivot outwards with a manual push — no power required — freeing the full passage width. For escape route requirements. EN 16005 compliant.

PORTALP TELESCOPIC

2, 3, 4 or 6-leaf variants. Smallest footprint on the largest doorway. Leaves telescope to one side or both.



SPECIALIST DOORS

CONTROLLED ENVIRONMENT

Hermetic & Airflow Control

Full access control and interlocking / theatre control panel integration. Wide variety of activation and safety devices.

HERMETIC SLIDING

4-sided airtight seal — leaf moves toward the wall and down to the floor in the closing cycle. For clean rooms, operating theatres, and isolation zones.

AIRFLOW CONTROL

3-sided hygienic seal. Air flows out under positive pressure; prevents ingress in negative pressure. Optional floor seal to augment performance.

GLAZING & MATERIALS

Lead-lined variants available. X-ray and laser-proofed glazing panels depending on application. Wide variety of activation and safety devices.

INTEGRATION

Full access control and interlocking. Theatre control panel integration. Compatible with third-party building management systems.



SPECIALIST DOORS

FIRE & HYGIENE

GRP & Steel Fire Resistant

DFM Steel Fire Resistant Doors constructed from zinc-plated steel skins with rockwool infill. Tested and certified to EN 1634-1 and EN 13501-2.

GRP DOORS

40mm pressure-moulded single or double leaves. Waterproof, non-porous, non-shedding. Fire-rated up to F120. Available with steel, stainless steel wraparound, or GRP block frame.

DFM STEEL FIRE RESISTANT

Zinc-plated steel skins with rockwool infill. EI 120 fire-rated and insulated. Max size 4170×4080mm. Factory powder-coated in full RAL range.

VISION PANELS

Fire-rated, X-ray, and laser-proofed glazing options. Privacy panels also available. Panel spec confirmed per project brief.

CERTIFICATIONS

GRP tested for cleanroom and critical area environments. Steel tested to EN 1634-1 and EN 13501-2. RC3 security class available under EN 1192.



CASE STUDY

RESIDENTIAL

Griffin Point, Dublin

Steel security doors and architectural ironmongery for cost-rental housing.

Client: Townmore Construction

Development: Cost-rental homes by Respond with Dublin City Council

Location: Dublin 13

DELIVERED

Insulated, ventilated steel security doors. Consort architectural ironmongery. ECO Schulte door closers. CES master-keyed cylinder system.

OUTCOME

Compliant, durable doors and hardware for high-traffic residential use — delivered and installed on schedule.



> *"From initial coordination through to final handover, their team demonstrated outstanding professionalism, dependability and technical expertise."*
>
> **— Paul McIntyre**
> Townmore Construction

CASE STUDY

EDUCATION

Old Buckley Building, Maynooth University

Automatic doors, steel doors and complete ironmongery for student accommodation.

Client: Vision Contracting

Development: Townhouse conversion to student accommodation

Location: Maynooth, Co. Kildare





DELIVERED

Automatic sliding and power-assisted swing doors. Fire-rated concealed riser doors. Security and ventilated steel doors. Complete ironmongery solution.

OUTCOME

Original architectural features retained; integrated access control throughout; delivered in 13–14 weeks, on time for the academic year.

> *"Planning, execution, and quality were all met on a tight deadline and in a challenging environment."*
>
> **— Ignor Martinis**
> Vision Contracting



CASE STUDY

HEALTHCARE

Bon Secours Hospital, Cork

Integrated access, specialist doors and parking across a major hospital campus.

Client: Bon Secours Health System

Contractor: Sisk

Partnership: Since 1997, across all Irish campuses



DELIVERED

Networked access control campus-wide. Specialist healthcare door systems. Full car park management. Ongoing 24/7 maintenance and support.



OUTCOME

29 years of continuous partnership across Cork, Dublin and Limerick — engaged across every service line.

CASE STUDY HEALTHCARE

Surgical Hubs — Cork, Waterford & Limerick

Specialist doors and theatre lockdown for the HSE's new regional surgical hubs.

Client: JJ Rhattigan, main contractor

Architect: OCMA Architects

Locations: Cork, Waterford & Limerick, delivered concurrently

WHAT WE DELIVERED

Fire-rated hygienic sliding doors across all three hubs, with integrated theatre lockdown. At Cork: lead-lined GRP and glazed sliding doors for surgical and recovery areas, fire-rated glazed doors through corridors and treatment rooms, and fire-rated steel doors for circulation.

THE CHALLENGE

Radiation protection, hermetic sealing, fire rating, secure lockdown and heavy-duty durability — often several on a single door — delivered to one standard across three live sites running at the same time.







OUTCOMES

Three hubs delivered simultaneously. On time and on budget across all three programmes. Snag-free at handover on every site. Fire rating, HTM, hermetic sealing and Code 3 lead lining all met.

Notes

Notes

Notes

CONTACT

Let's talk.

Whether you're specifying a single door set or a complete nationwide project, our team is on hand to match the right hardware, doors, locking and automation to every application.

We hold stock in Cork and operate a nationwide service team for installation, preventive maintenance and reactive emergency response.

Contact us for technical specification support, CPD presentations, or to request samples.

HQ CORK

Unit 26 Doughcloyne Industrial Estate, Wilton, Co. Cork, Ireland.

KILDARE

Monread Industrial Estate, Monread Rd, Monread North, Naas, Co. Kildare, W91 R2XW

SECTORS SERVED

Healthcare
Construction
Government
Hospitality
Retail
Pharma
Facilities Management

EMAIL

contact@mfservices.ie

WEB

mfservices.ie

TELEPHONE

+353 21 434 8996

CERTIFICATIONS

ISO 9001 Certified. PSA Licensed. CE-certified product range.

FOUR DECADES OF DELIVERING

Founded 1985. Trusted by architects, engineers, builders, and facilities managers on Ireland's most demanding projects.

MF SERVICES